

UNDER PIPE SUPPORT - TYPE B [Ref: UPS/B]


An anti-wear support and insulating block fitted between pipe and rack to prevent corrosion.

Under pipe supports prevent corrosion caused by:
Wear from thermal movement
Galvanic action between dissimilar metals
Moisture build up.

Available in three configurations for different operating conditions (types A, B and C)

Type B are supplied with a factory fitted adhesive tape covering the entire curved surface and overlapping the edges by 2-3 mm. The type B are intended for use where the objective is to provide an anti-galvanic corrosion barrier between the pipe and the pipe rack and where little or no movement between the pipe and the rack is anticipated.

UNDER PIPE SUPPORT - TYPE B

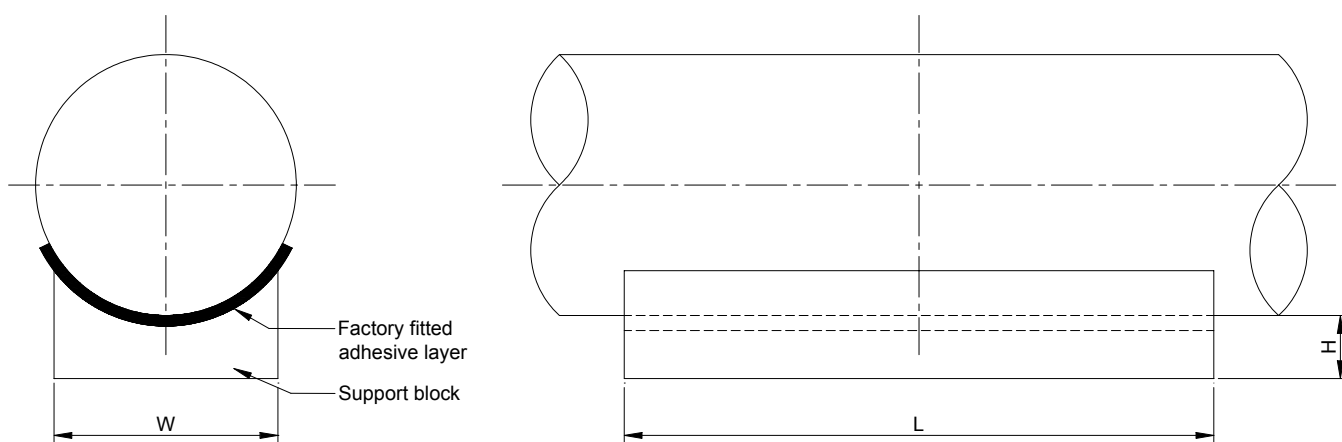

Part Number	Nominal Pipe Diameter	Height, H	Width, W	Length, L
UPS/1/B	1"	13	20	356
UPS/2/B	2"	13	23 *	356
UPS/3/B	3"	13	47	356
UPS/4/B	4"	13	47	356
UPS/6/B	6"	13	73	356
UPS/8/B	8"	13	73	356
UPS/10/B	10"	13	73	356
UPS/12/B	12"	13	102	356
UPS/14/B	14"	13	102	356
UPS/16/B	16"	13	102	356
UPS/18/B	18"	13	152	406
UPS/20/B	20"	13	152	406
UPS/24/B	24"	13	152	406

* An alternative 2" size UPS is available with a width of 40mm (Part Number UPS/2/EX/B)

Design criteria: Under pipe supports are designed for standard steel pipes including water loads on 100 - 150 mm support beams at spans up to 8 m.

NOTES:

- Unless otherwise stated, all dimensions are in millimetres.
- Operating temperature range -35°C to +150°C
- Support block material: **ASEplas** 1010 SWA.
- Factory fitted adhesive layer: acrylic adhesive with reinforced acrylic foam carrier.
- Under pipe supports type A and C also available for different operating conditions.

Atlantic Supports Engineering Ltd

Tel: +44 (029) 20 708461, Fax +44 (029) 20 350437
E-mail: sales@atlantic-supports.co.uk

Issue: 2.2 – 03/07/02

